

100


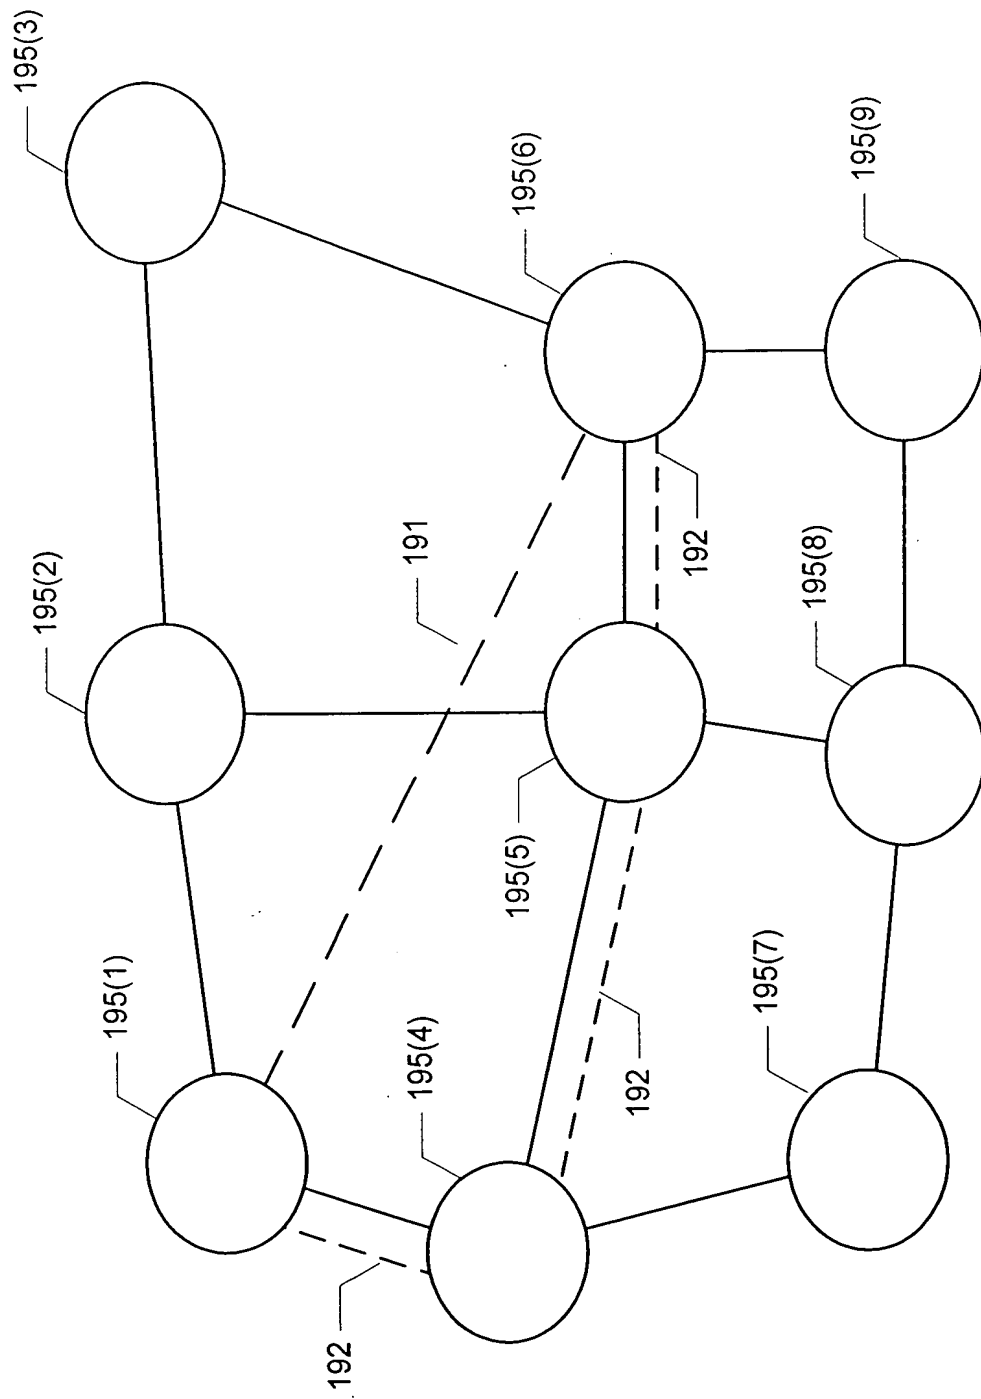


FIG. 1

Figure 1 displays 12 histograms, labeled x_0 through x_{11} , showing the distribution of the number of non-zero elements in the vector x_k . The x-axis represents the number of non-zero elements (0 to 10), and the y-axis represents the count (0 to 10). The distributions are roughly bell-shaped and centered around 5, with the peak count increasing from 10 at x_0 to 12 at x_{11} .

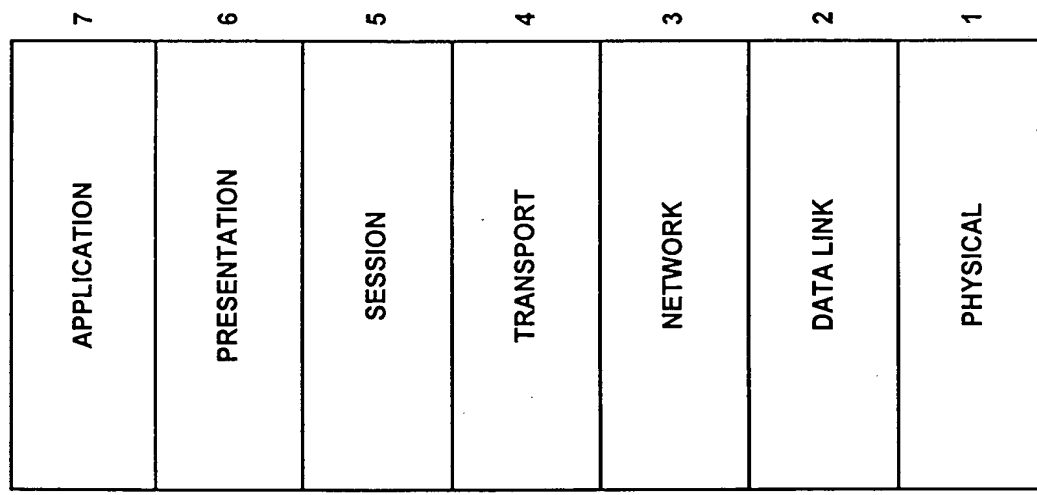

VERSION 310	IHL 311	TYPE-OF-SERVICE 312	TOTAL LENGTH 313	
IDENTIFICATION 320			FLAGS 321	FRAGMENT OFFSET 322
			HEADER CHECKSUM 332	
TIME-TO-LIVE 330	PROTOCOL 331		SOURCE ADDRESS 340	
DESTINATION ADDRESS 350				
OPTIONS + PADDING 360				
DATA 370				

FIG. 3

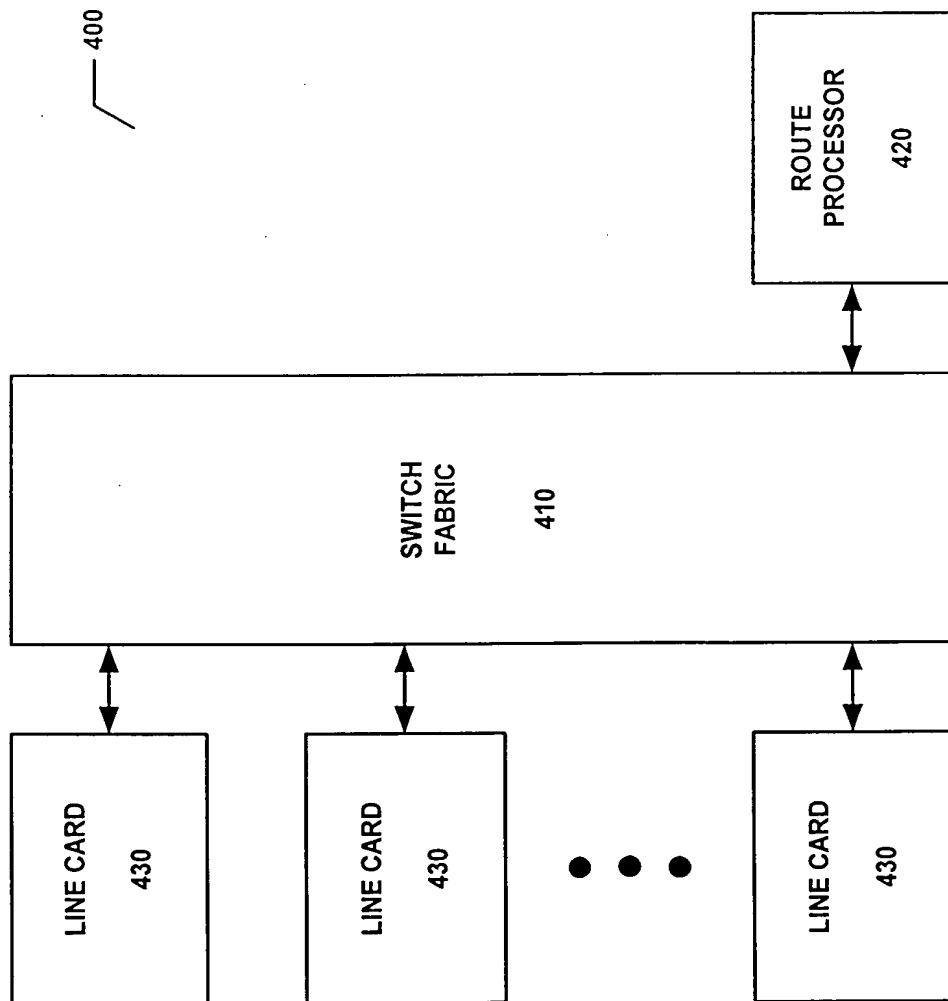


FIG. 4

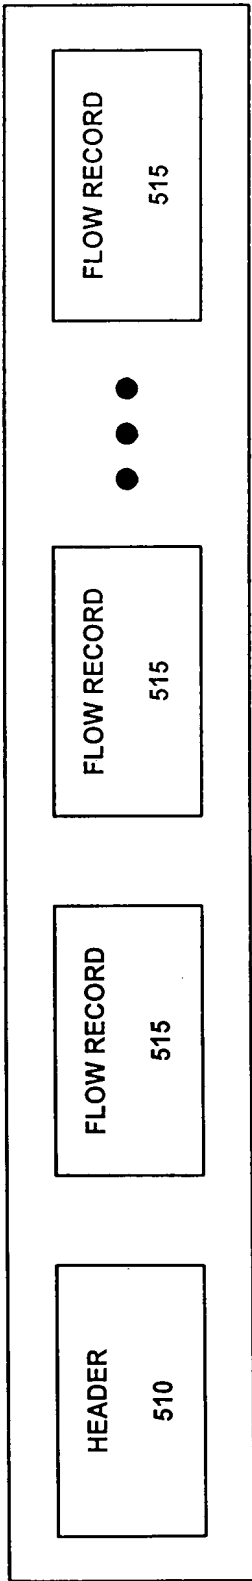


FIG. 5A

VERSION 521		COUNT 522
SYSTEM UP TIME 523		
UNIX SECONDS 524		
UNIX NSECONDS 525		
FLOW SEQUENCE 526		
ENGINE TYPE 527	ENGINE ID 528	PAD 529

510

FIG. 5B

515

SOURCE IP ADDRESS 531			
DESTINATION IP ADDRESS 532			
NEXT HOP 533			
INPUT 534		OUTPUT 535	
NUMBER OF PACKETS 536			
NUMBER OF LAYER 3 BYTES 537			
FIRST 538			
LAST 539			
SOURCE PORT 540		DEST. PORT 541	
PAD 542	TCP FLAGS 543	PROTOCOL 544	TOS 545
SOURCE AS 546		DEST. AS 547	
SOURCE MASK 548	DEST. MASK 549	PAD 550	

SAMPLING MODE 610	SAMPLING INTERVAL 615
----------------------	--------------------------

FIG. 6

FIG. 5C

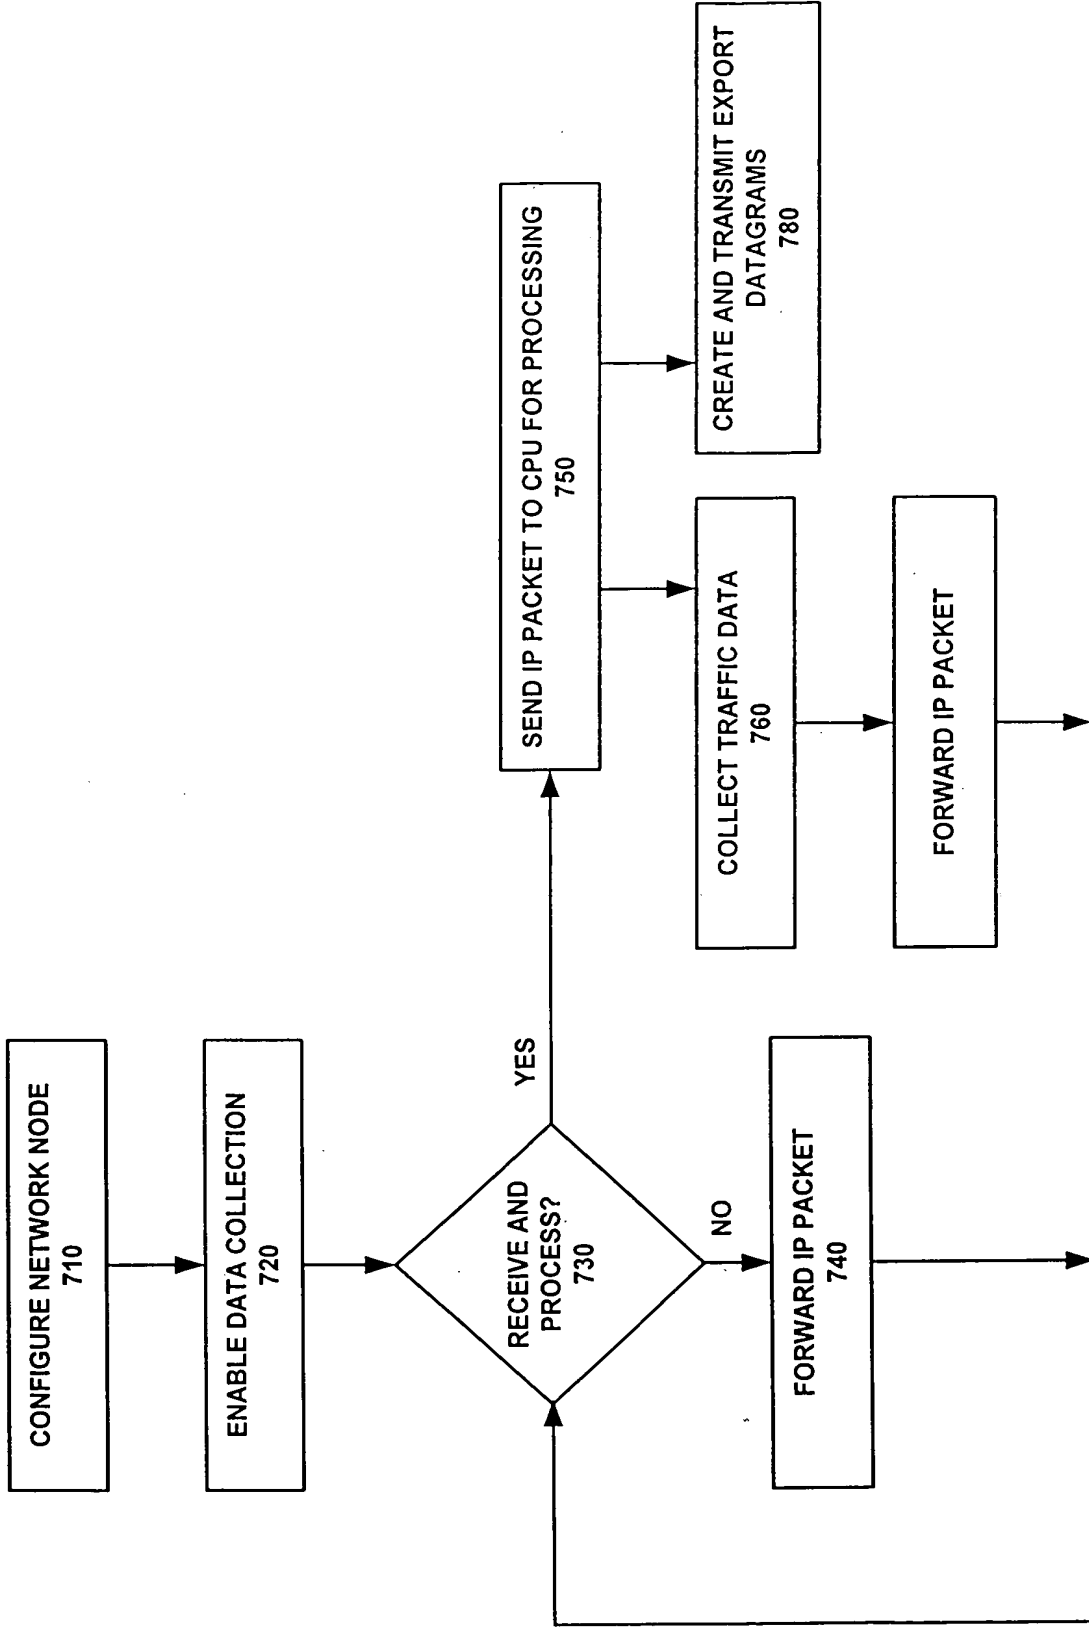


FIG. 7